


CONTINUOUS PRODUCTION

of bonded carpet underlayment

REBONDER

Continuous production of bonded carpet underlayment is available with Rebonder. The Rebonder system converts low value

flexible polyurethane salvage into a high value carpet underlayment for which there is a steadily growing market that is as large as the carpet industry itself. This continuous process eliminates as much as 50% of the labor in older methods and reduces waste and regrind by as much as 95%. Film or backing is applied "on the run," and the finished product is automatically compressed, as it is rolled up, wrapped and sealed in standard lengths at the end of the line.

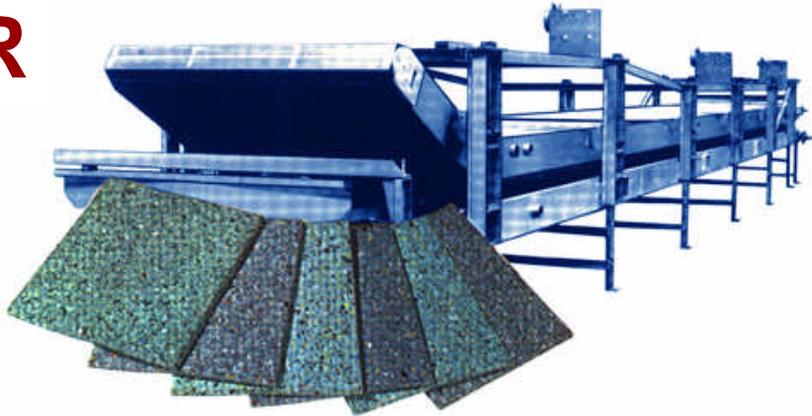

Rebonder can produce carpet cushion in a continuous 72" width sheet, with controlled thicknesses from 1/4" to 1" and at speeds from 10' to 60' per minute. The 200 foot long Rebonder has a production potential of 19,000 square yards per eight-hour shift.

Convert You Scrape Foam Into Profitable Carpet Underlayment

The Rebonder system can work around the clock converting your low value scrap foam into high quality carpet underlayment for which there is increasing demand. We will test and install all of the components of the system from bulk storage of the polyurethane salvage, to the machinery that packages each roll of finished product. Call us today and turn your scrap foam problem into a profit.

CONTINUOUS PRODUCTION

is the way to profit!

Rebonder turns your scrap foam into profit!

The Rebonder system makes possible the continuous production of carpet underlayment padding from scrap urethane foam. This “hands off” process produces a better quality cushion faster and more profitably than any other method. And it can operate on a multi-shift basis, endlessly turning out carpet pad to the exact thickness and density desired, with a minimal crew of workers.



In this system, scrap foam is shredded, mixed evenly with bonding agents, compressed, cured, rolled up and packaged ready for shipment – in an uninterrupted production process. The finished underlayment can be of foam only or with scrim bonded to one or both sides. Its quality is exceptional, the bonding tight and the thickness predictably uniform, with a pleasing distribution of the various colors of scrap foam.

Chief sales features of BONDED carpet underlayment:

- Resists compression set and recovers quickly from indentations
- Is fire resistant
- Is light weight and easy to handle
- Installs quickly and expertly
- Has excellent insulation and sound absorption qualities
- Moisture-proof, washable and can be sterilized
- Durable will last as long as carpet
- Fungus-proof and rot-resistant
- Chemically inert and will not bleed color
- Odorless and non-allergenic